

JOB _____

TYPE _____

CATALOG # _____



APPLICATION

- SLEEK, CRISP VERSATILE TASK AND ACCENT FIXTURES FOR MOUNTING UNDER SHELVES OR IN/UNDER CABINETRY.
- 1" PROFILE ALLOWS FOR FIXTURE CONCEALMENT.


FINISH

- AVAILABLE IN WHITE, BRONZE, AND BRUSHED NICKLE FINISHES.


CONSTRUCTION

- DIE-FORMED STEEL HOUSING.
- COMPLETE SET OF KNOCKOUTS FOR HARD WIRING.
- 6' POWER CORD STANDARD.
- KEY HOLE MOUNTING SLOTS.
- FROSTED GLASS DIFFUSER.
- LINKABLE UP TO 10 UNITS.
- 18" CONNECTING CORD STANDARD.
- AVAILABLE IN 12", 21", 24", 33" AND 42" LENGTHS.
- 4,000° K LED WHITE LIGHT.
- ROMEX CONNECTOR INCLUDED.
- HIGH / LOW / OFF ROCKER SWITCH
- DOES NOT MEET MADE IN USA OR BAA REQUIREMENTS.

ELECTRICAL

- 120 VOLT INPUT.
- HARD WIRE OR PLUG-IN.
-  LISTED
- 40,000 AVERAGE LIFE OF LED'S.

LEDUC SERIES

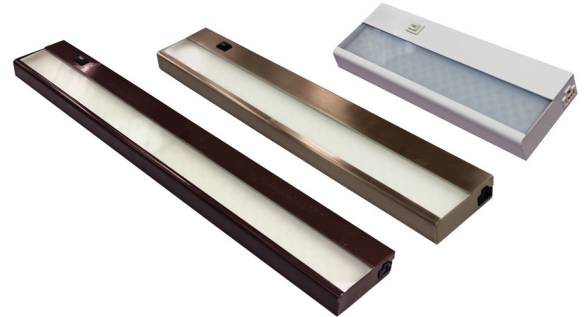

LED UNDERCABINET LIGHTING CONTRACTOR SERIES

ORDERING GUIDE

EXAMPLE: LEDUC12WH

SERIES	SIZE	FINISH	
LEDUC	12	WH	Size: 12 - 12.75"Lx3.5"Wx1"H 21 - 21.75"Lx3.5"Wx1"H 24 - 25"Lx3.5"Wx1"H 33 - 34"Lx3.5"Wx1"H 42 - 43.25"Lx3.5"Wx1"H FINISH: WH - WHITE BZ - BRONZE BN - BRUSHED NICKLE WATTS: 12" - 4 WATT (300 LUMENS) 21" - 7 WATT (540 LUMENS) 24" - 8 WATT (600 LUMENS) 33" - 12 WATT (840 LUMENS) 42" - 15 WATT (1080 LUMENS)
	21	BZ	
	24	BN	
	33		
	42		



LEDOC SERIES

DIMENSIONS

SPECIFICATIONS AND DIMENSIONAL DATA SUBJECT TO
CHANGE WITHOUT NOTICE.

